

# HOW TO CONNECT AGM 12V BATTERIES IN SERIES AND PARALLEL

01



## WHAT ARE THE TYPES OF CONNECTION ?

If you have ever worked with batteries you have probably come across the terms **series, parallel, and series-parallel**, but what exactly do these terms mean? Series, Series-Parallel, and Parallel is the act of connecting two batteries together, but why would you want to connect two or more batteries together in the first place? By connecting two or more batteries in either series, series-parallel, or parallel, you can increase the voltage or amp-hour capacity, or even both; allowing for higher voltage or power hungry applications.


02



## CONNECTING BATTERIES IN SERIES

Connecting a battery in series is when you connect two or more batteries together to increase the battery systems overall voltage, connecting batteries in series does not increase the capacity only the voltage. For example if you connect four 12Volt 140Ah batteries you will have a battery voltage of 48Volts and battery capacity of 140Ah. To configure batteries with a series connection each battery must have the same voltage and capacity rating, or you can potentially damage the batteries.

**We recommend you charge each battery individually to avoid battery imbalance. When charging batteries in series, you need to use a charger that matches the battery system voltage.**

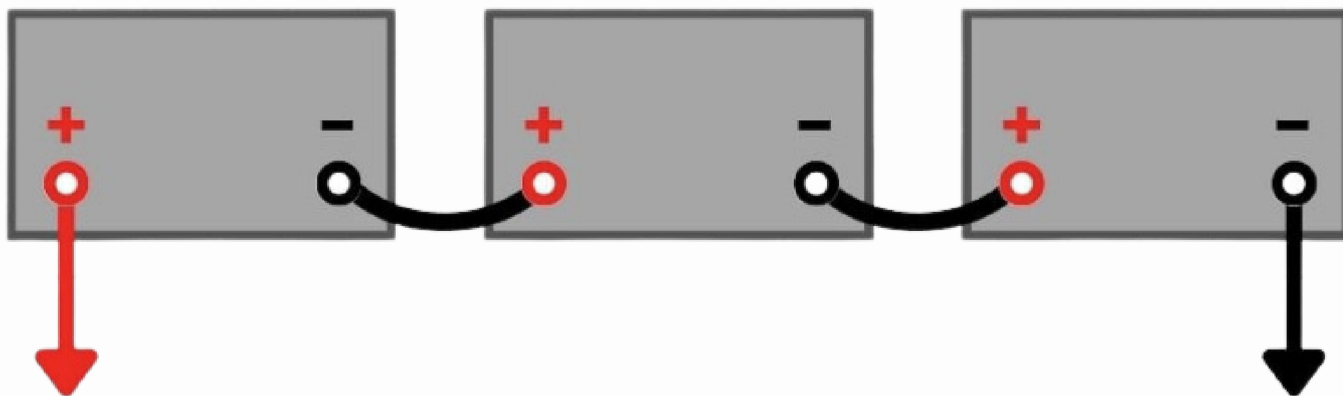

To connect a group of batteries in series you connect the negative terminal of one battery to the positive terminal of another and so on until all batteries are connected, you would then connect a link/cable to the negative terminal of the first battery in your string of batteries to your application, then another link/cable to the positive terminal of the last battery in your string to your application.

03



## CONNECTING BATTERIES IN PARALLEL

Connecting a battery in parallel is when you connect two or more batteries together to increase the amp-hour capacity, with a parallel battery connection the capacity will increase, however the battery voltage will remain the same. For example if you connect four 12V 100Ah batteries you would get a 12V 400Ah battery system..


04



## CONNECTING BATTERIES IN PARALLEL

When connecting batteries in parallel the negative terminal of one battery is connected to the negative terminal of the next and so on through the string of batteries, the same is done with positive terminals, ie positive terminal of one battery to the positive terminal of the next. For example if you needed a 12V 300Ah battery system you will need to connect three 12V 100Ah batteries together in parallel.

**Parallel battery configuration helps increase the duration in which batteries can power equipment, but due to the increased amp-hour capacity they can take longer to charge than series connected batteries**

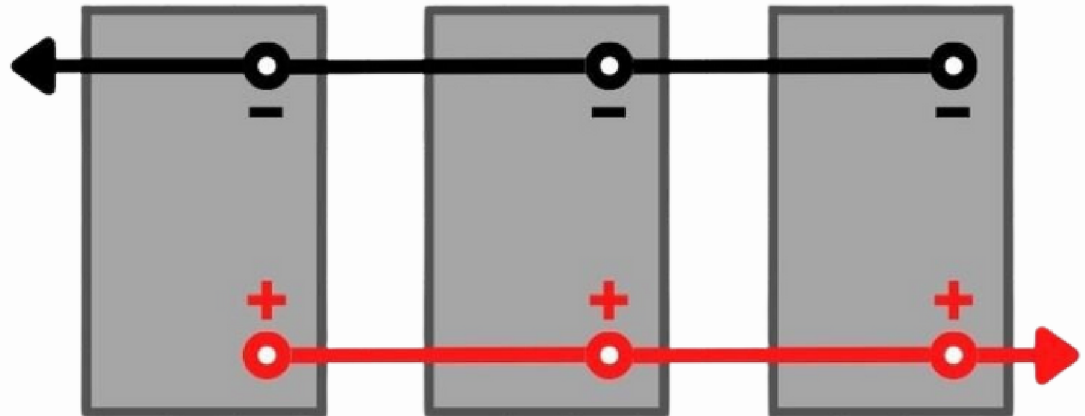

05



## SERIES-PARALLEL CONNECTED BATTERIES

Last but not least! There is series-parallel connected batteries. Series-parallel connection is when you connect a string of batteries to increase both the voltage and capacity of the battery system. For example you can connect six 6V 100Ah batteries together to give you a 24V 200Ah battery, this is achieved by configuring two strings of four batteries. In this connection you will have two or more sets of batteries which will be configured in both series and parallel to increase the system capacity.

